


Flex DVD

**NOTE: DO NOT FLATTEN OVERLAY TEMPLATE ONTO YOUR ARTWORK.
USE THIS TEMPLATE OVERLAY LAYER AS A GUIDE ONLY**

REMEMBER:

- CONVERT ALL TEXT TO CURVES OR OUTLINES BEFORE SENDING
- Linked graphics should be a minimum of 300 dots/pixels per inch
- CMYK color mode.

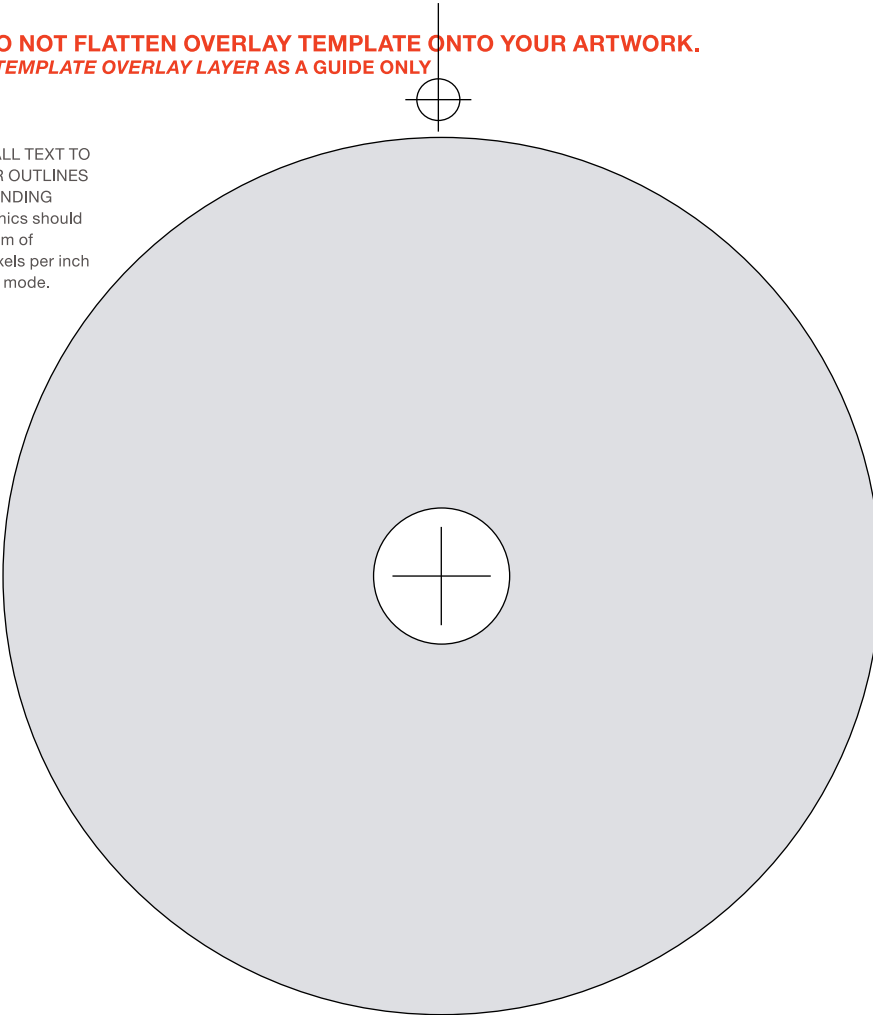

Dis claimer:

The following specs must be followed carefully to assure optimal print quality for the product. Failure to follow these specs may produce unexpected and unwanted results. Approval of this disc assumes that the client has read and understands the specs below and accepts responsibility for the final printed discs.

- All halftone (rastered) images should be at least 300 dpi resolution.
- All color images should be in CMYK mode. (not RGB)
- All screens that fall below 20% may drop out to 0% when screen printed onto the final cds.
- All screens above 90% may fill in to 100% when screen printed onto the final cds.

Type Specifications

- Avoid using any typeface smaller than 6 points.
- Type reversing out of the four process colors should not be less than 8 points.
- Any type reversing out of a color should not be less than 7 points.
- A serif font, like Times or Garamond, is difficult to print if less than 7 points. A less delicate font like Helvetica or Univers works better at small point sizes.
- If building type out of the four process colors, go no smaller than 10 points.
- Use actual versions of bold and italic fonts. Do not add bold and italic "attributes" to fonts in Quark.

* We make no attempt to make artistic or design judgements/ decisions for the client. Designs should be proof read prior to submission.

* Although we will do our best to accurately print CMYK disc labels, we can not guarantee exact color matching due to the limitations of the screen printing process.

CMYK